



Rev. No	Description	E.C.O	Date

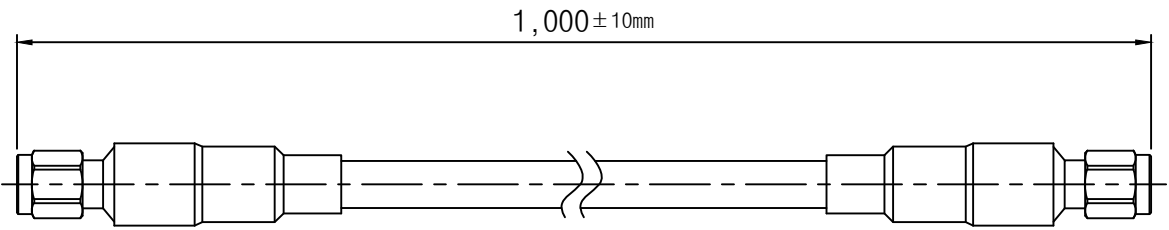

Connector P/N : SMA(M)_ST18_01

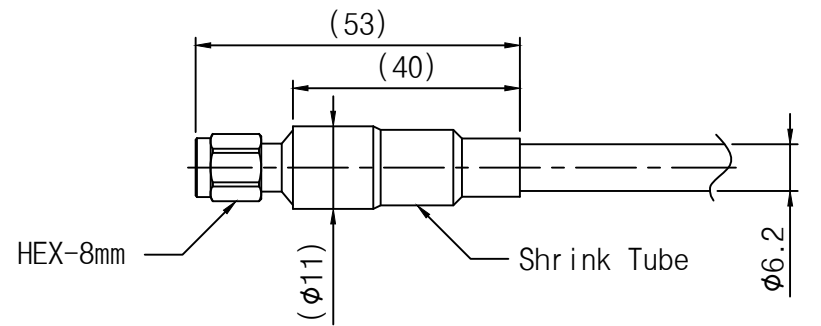

Cable P/N : 13S18

Specifications	Materials(Cable)
MIL-C-17 : Cable MIL-PRF-39012 : Connectors MIL-G-45204 : Gold Plating, Electrodeposited MIL-I-23053 : Insulation Sleeving etc. MIL-P-46179 : Plastic Molding etc. MIL-R-46198 : Resin, Polyimide etc.	1. Cable Center Conductor Solid SPC (ASTM B 298) 2. Cable Dielectric Low Density PTFE in accordance with the applicable paragraph of MIL C 17
Military Standards MIL-STD-202 : Test Method MIL-STD-810 : Test Method for Environmental MIL-STD-1344 : Test Method for Connectors	3. Cable Inner Shield SPC Flat Wire (ASTM B 298) 4. Cable Outer Shield SPC Round Wire (ASTM B 298)
Materials(Connector)	5. Cable Jacket High Temperature Resin

Materials(Connector)	Cable Constriction
1. Body Stainless Steel (ASTM A 582), Passivated Brass (C3604)(ASTM B 16), Au Plated 2. Center Conductor Brass (C3604)(ASTM B 16), Au Plated 3. Insulator PTFE (ASTM D 1710) PEI0113 (ASTM D 5205) 4. Coupling Nut Stainless Steel (ASTM A 582), Passivated	

Insertion loss graph(Cable)	Electrical Characteristics (Cable)
<p>Insertion Loss per meter[m] Cable : 13A18 / 13S18 / 13F18</p>	<ol style="list-style-type: none"> Impedance : 50 Ohm Capacitance : 88 pF/m, 26.8 pF/ft Velocity of Propagation : 77 % Delay : 4.34 ns/m, 1.32 ns/ft Insertion Loss : -1.25dB/m @18GHz Typ. -1.38dB/m @18GHz Min. RF Leakage : -100dB

Mechanical Characteristics (Cable)
<ol style="list-style-type: none"> Minimum Bend Radius : 30mm Temperature Range : -50°C / +135°C Weight Nominal : 73.4 g/m

Electrical Characteristics (Connector)
<ol style="list-style-type: none"> Impedance : 50 Ohm Frequency : DC to 18GHz VSWR : 1.13 : 1 @18GHz Typ. 1.23 : 1 @18GHz Max. Insertion Loss : -0.10dB/EA @18GHz RF Leakage : -100dB



THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED OR REPRODUCED WITHOUT THE PERMISSION OF SensorView Co., Ltd



Common Tolerance	Ass'y Name	SMA(m) for 13S18			Ass'y No.	SMA(M)_ST18_01-13S18-SMA(M)_ST18_01-1.0M				Size	-	Date	-	Name	-	Signature	-				
	Seismic Center	Seismic Center	○	±0.03	Group 1	Group 2	Group 3	Drawing No.	-			Material	-			Approved By	JM_PARK				
		Cylinder	○	±0.03		Entry	X		X.X	Scale	N/S		Revision No.	-	Plate		-			Checked By	SW_HAN
		Coaxiality	◎	±0.03		Tolerance	±0.3		±0.2	±0.1	Projection		⊕	Sheet Size			A4	General External	-		
Concentric	◎	±0.03	Angle	±3.0°	±2.0°	±1.0°	Unit	mm	Sheet	1 of 1	-										